

Application

Beam style	well-defined, flat field profile projection
Suitable for	medium - large scale theatres, arenas, medium to long-throw applications
Specification level	professional range
Beam angle	8° - 22°
Typical throw distance	10 – 45m

Electrical specifications

Supply Volts	230V AC single phase to ballast unit
Max. Lamp Watts	1500W
Lamp base	PGJX50 FastFit
Ballast	external unit, electronic flicker-free ballast with separate pulse ignitor and on/off switch
Fuse	20A, on ballast
Auto-disconnect	no
Cable/connection	2m, multicore cable to ballast; 2m 3x2.5mm ² bare ended cable to power
Standards Compliance	EN60598-2-17, CE marked

Mechanical specifications

Paint/Finish	epoxy powder paint, black
Lamp House Construction	extruded aluminium and sheet steel
Reflector	87,5mm diameter glass
Optical system	double condenser with variable zoom
Mounting & suspension	steel stirrup with 12mm centre hole and DIN mounting. Spigot for ø29mm tube supplied
Control of pan and tilt	two large rubber handles
Weight/Packed weight	19,8kg / 29 kg - ballast: 8,5kg /10,5 kg – kit: 70 kg
Packed volume	0.204m ³ ballast: 0.049m ³
Filter cut size	185 x 185mm
Accessory runners	3 slots
Colour frame	metal, 185 x 185mm, supplied
Lamp access	removable side panel on the lamp-house
Lens access	sliding panels beneath lamp tube

Operational specifications

Focus adjustment	slide zoom controls (dia./softness) at side
Lamp alignment	not requested
Beam shaping	20-leaf iris included; shutters: accessories
Dimming	optical dimmer iris included
Positional adjustment	lever tilt clamp

Lamp types

1500W 6000K	Philips 1500 MSR Gold FastFit PGJX50 750 hrs
-------------	--

LDR recommends Philips lamps

Accessories

Spare metal colour frame	■20100106
5-colour colour changer	■20105106
Spare iris diaphragm	20100707
Gobo holder, A/B size	20100807
Black tripod	20102401
Chrome plated tripod	20102402
Spare spigot ø29mm	20102200
Kit 1-hand control iris/dowser	20107070
Stirrup-kit for suspension	20102900
Flight case with braking wheels	20107180 for f.spot/ballast/col.chang./tripod

Photometric data

Narrow focus		MSR 1500Gold Fast Fit									
Beam dia.		2.5	2.7	2.9	3.1	3.3	3.6	3.8	4.0	4.2	m
lux		4048	3449	2974	2591	2277	2017	1799	1615	1457	
Distance		24	26	28	30	32	34	36	38	40	m

Wide focus

Beam dia.		3.2	3.7	4.2	4.7	5.3	5.8	6.3	6.8	7.4	m
lux		4153	3051	2336	1846	1495	1236	1038	885	763	
Distance		12	14	16	18	20	22	24	26	28	m

LUCI DELLA RIBALTA PROFESSIONAL LIGHTING PRODUCTS


Canto® 1500msr FF

1500W

230V 50/60Hz

discharge followspot

part number : 10867180 Followspot /K10867180 kit

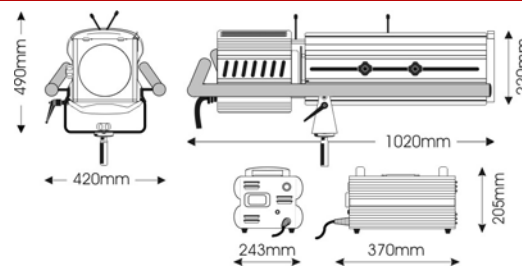

New concept, efficient, lightweight and extremely powerful 1500W discharge followspot for more power at middle-long distance. The MSR filling of the lamp guarantees pure, white light, whereas the short arc provides high beam intensity for professional entertainment lighting.

Canto® 1500 msr FF features the patented FastFit rear load lamp base system, which enables easy lamp replacement in difficult stage conditions.

Canto® 1500 msr FF features an electronic, flicker-free external ballast unit and is delivered complete with two large side control handles, colour frame, 20-leaf iris, mechanical dimmer, spigot and 2m mains cable.

Also available in the kit version, including fitted colour changer, tripod and lamp in flight case



Luci della Ribalta srl
Via Berna 14
46042 Castel Goffredo (MN), Italy
tel: +39 0376 771777
fax: +39 0376 772140
www.ldr.it info@ldr.it

issue: ap ©2015. LDR reserves the right to alter the specification without prior notice