


Musical Instrument Cable

eurocable single conductor cable mainly used for the connection of unbalanced musical instruments. This cable gives superior performance with its special double shield (spiral plus thermoplastic shield) that provides an excellent insulation even from noise caused by the shield rubbing against the dielectric (microphone effect), at the same time preserving flexibility and high temperature resistance.



MOBILE
JACKET COLOR
100 m ON CARDBOARD REELS

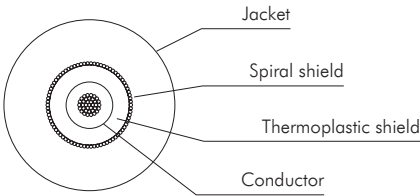

CVS LK01N6S2
<ul style="list-style-type: none">• Excellent insulation to prevent microphone effect.• High temperature resistance.• Thermoplastic shield.



ELECTRICAL DATA		
D.C.R. at 20°C	Conductor	≤ 78 ohm/km
	Shield	≤ 50 ohm/km
Capacitance	CDR/CDR 1 KHz	-
	CDR/SDR 1 KHz	130 pF/m
Nominal Impedance 1 KHz		360 ohm/100 m
Attenuation 1 KHz		0.25 db/100 m
Inductance		< 16 µH/100 m
GENERAL DATA		
Cable	O.D.	6.00 mm
	Standard reels	100 m
	Weight	3.50 Kg/100 m
	Operating temperature	-5°C/+70°C
Jacket	Material	PVC
	Nom. Thick.	1.7 mm
Shield (double)	Material	First: Conductive graphite - Second: Spiral bare copper shield
	Coverage	First: 100% - Second: 95%
Conductor	Qty	1
	Strand	30 x 0.10 mm
	Area/AWG	0.22 mm²/24
	Insul. O.D.	1.70 mm
	Material	Bare copper polyethylene insulated

Not suitable for applications above 50 volt ac; 75 volt dc.